



**Shenzhen Dinghua Technology Development Co., LTD.**

---

# **Product Introduction**

---

# Company Profile




## Shenzhen Dinghua Technology Development Co., LTD.

- Years experiences in SMT/BGA rework industry.
- Research, Develop, Design, Manufacture and Export BGA Rework Station, Automatic Soldering Machine, Automatic Glue Dispenser, Automatic Screw Locking Machine.
- 38 Patents And 97 Quality Control Process
- China National High-Tech Enterprise, IPC certified, SMT Association Membership, etc.
- One of leading manufacturers in China as a professional Rework Solution Provider.



## Business Partners

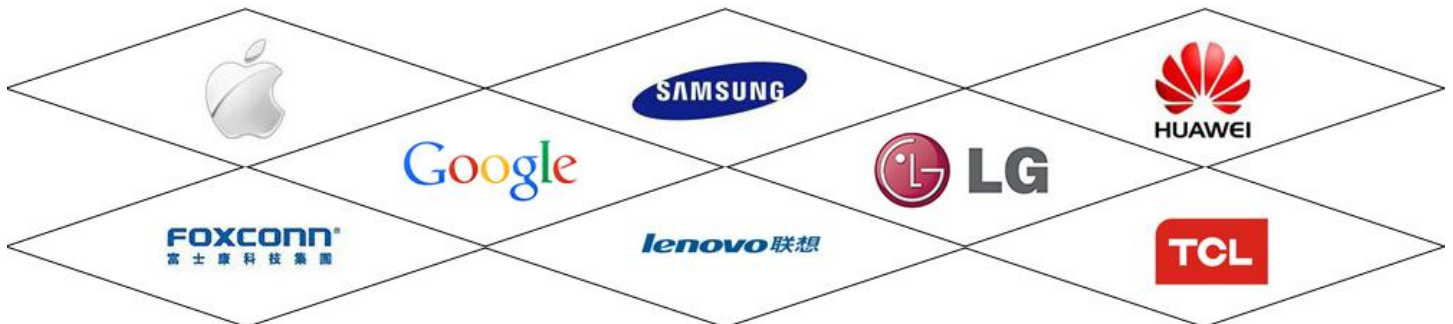

# Product Presentation



## BGA Rework Station

### Model:DH-A2


- Automatic & Manual Modes Optional
- CCD Optical Alignment System Placing Precision:0.015mm
- Repair Success Rate: 99%+
- Touch screen control
- Laser Positioning

Power	5300W
Top heater	Hot air 1200W
Bottom heater	Hot air 1200W, Infrared 2700W
Power supply	AC220V±10% 50/60Hz
Dimension	L530*W670*H790 mm
Positioning	V-groove PCB support, and with external universal fixture
Temperature control	K type thermocouple, closed loop control, independent heating
Temperature accuracy	±2°C
PCB size	Max 450*490 mm, Min 22*22 mm
Workbench fine-tuning	±15mm forward/backward,±15mm right/left
BGA chip	80*80-1*1mm
Minimum chip spacing	0.15mm
Temp Sensor	1(optional)
Net weight	70kg

# Product Image



Monitor/Display



CCD Camera




Micrometer for Chip




Top Air Flow Adjust




Cross-Flow Cooling Fan




Vacuum Sucker



Infrared Laser Positioning



Micrometer for PCB



Joystick Control



HD Touch Screen



Emergency Stop Button



Rotary Handle




# Function



## Strict Temperature Control System

Even and focused heating effectively avoid fake or bad soldering and increase success rate of repairing.

- 8 segments rising temperature/constant time/temperature rising slope, It can save tens of thousands of groups temperature curves.
- It uses k-type thermocouple closed-loop control and PID automatic temperature compensation system, together with PLC and temperature module to enable precise temperature deviation to  $\pm 2$  degree centigrade.
- The external sensor can detect temperature precisely, analyze and calibrate the real temperature curve accurately at any time.

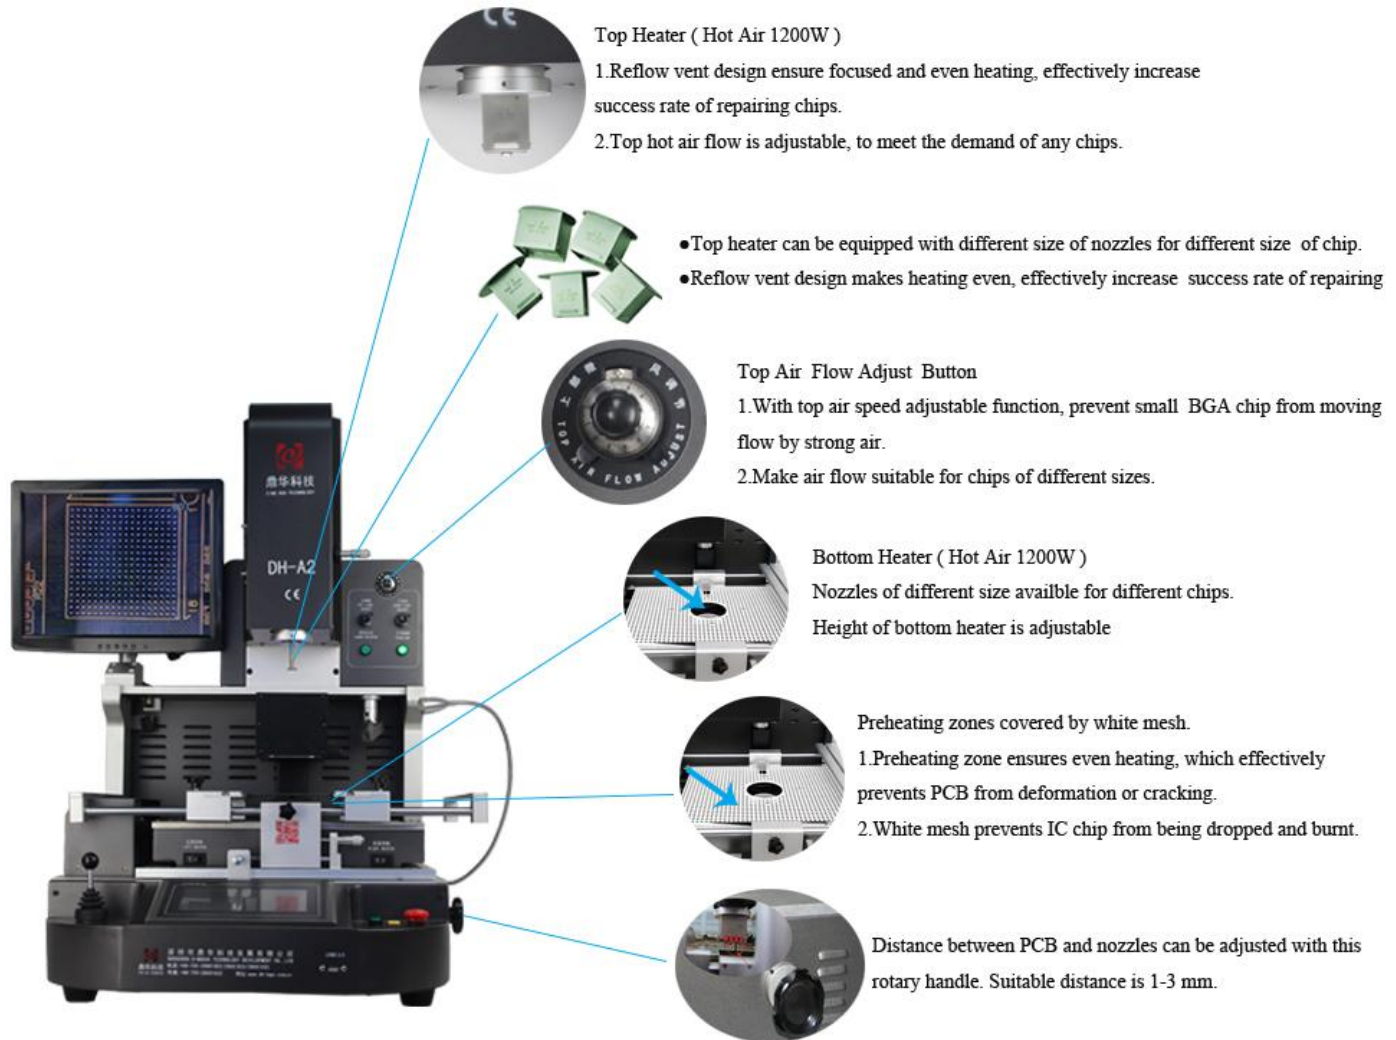

# Function

## Precision Optical Alignment System




- Effectively monitor alignment of every soldering joint and increase success rate of repairing.
- Color optical system with functions of split vision, two color separation, zoom in/out and micro-adjust, equipped with aberration detection device, with auto focus and software operation



### HD digital display

Effectively show conditions of alignment of soldering joint.

On the image, red points are for soldering point on PCB while blue points are for IC chip.



### Precise CCD optical alignment system.

- 1.6 million pixels.
- Mounting accuracy within 0.01mm.
- Brand: Panasonic




### Micrometer

- Slightly adjust angle of IC chip for precise alignment.
- Mounting accuracy within 0.01mm.
- Effectively increase success rate of repairing.




- Slightly adjust brightness of LED light of CCD lens in up/down direction.
- Ensure precision alignment.
- Increase success rate.



### Micrometer

Slightly adjust position of PCB to ensure Precision alignment of every soldering joint, effectively increase success rate of repairing

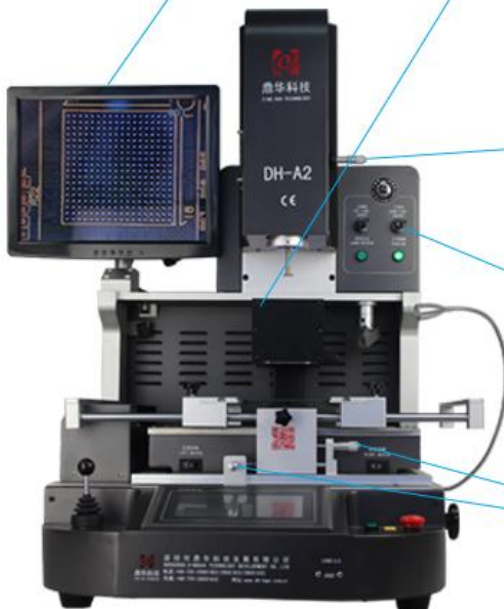


# Function



## Safety system

- With automatic power-off protection device when abnormal accident happens, with a double over-heating protection control.
- CE certified



Built-in pressure testing device, can detect pressure of 0.5g. While the test ing device detect pressure, the head of machine will stop declining automatically to protect the PCB from being damaged.




Cool air flow will be from top and bottom nozzles as soon as soldering/desoldering process finish, High temperature will drop to normal temperature soon.




Voice warning  
5 seconds before soldering/desoldering process complete.



Electric leakage Switch  
Ensure 100% percent safety of operator and machine.

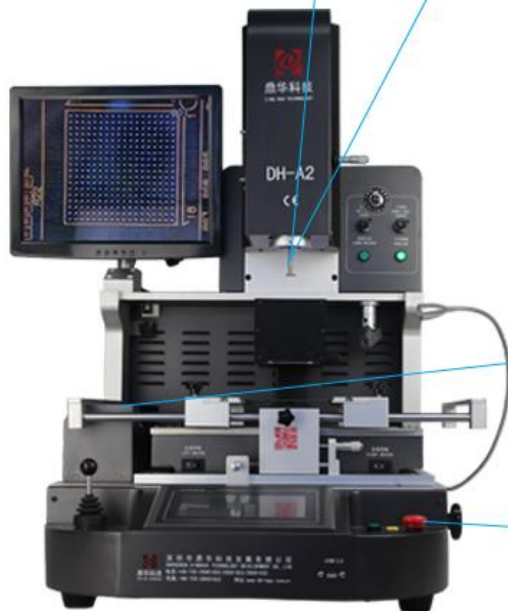

Powerful Cross-flow cooling fan  
1. Cooling fan produces cross cool air flow as soon as soldering/desoldering process finish, which effectively avoid deformation of PCB.



1. Press emergency stop in case of any emergency.  
2. Automatic power-off switch in case of emergency.

# Function


## Other Functions



Built-in infrared laser positioning, help fast positioning for PCB board.

LED headlamp

1. Super bright
2. Imported from Taiwan.
3. It can help you clearly see the melting condition of solder ball and check if there is any dirt on PCB and chip.

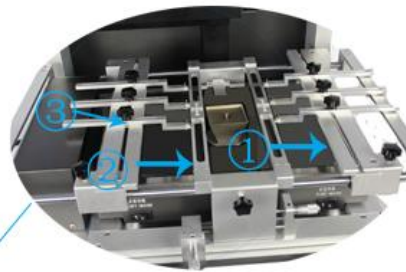

Flexible ways available for PCB position

1. ①Position: V-groove+②PCB support+③universal fixtures. Different ways for different PCB.

Blowing Cylinder

2. Movable PCB shelf.
3. Composed of 16mm chrome plated rod. Very stable and strong.




USB 2.0

USB port

1. Transfer information(temperature profile) to computer.
2. Update system.



# Packing List

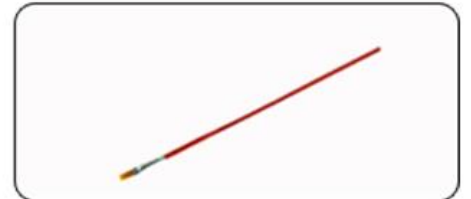

# Certificates



**Shenzhen Dinghua Technology Development Co., LTD.**

深圳市鼎华科技发展有限公司



# Thank You!

- Contact: Alice Huang
- MOB/WhatsApp/Wechat: +86 13723478812
- Email:[alicehuang@dinghua-bga.com](mailto:alicehuang@dinghua-bga.com)
- Skype: dhweld001
- Factory Address: Building 6B, Shengzuozhi Industrial Zone, Xinqiao, Shajing, Bao'an Area, Shenzhen, China
- Web:<https://www.sinobga.com>
- Web:<https://dh-bga.en.alibaba.com>